



Type 1025FA 方塊型保險絲 Fast Acting Brick Fuse




Dimensions(mm)尺寸

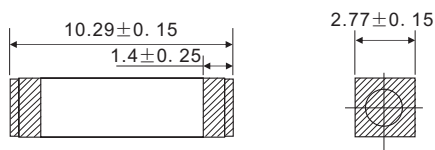

Recommended Pad Layout(mm)



Time Current Characteristic Curve/電流-時間曲線

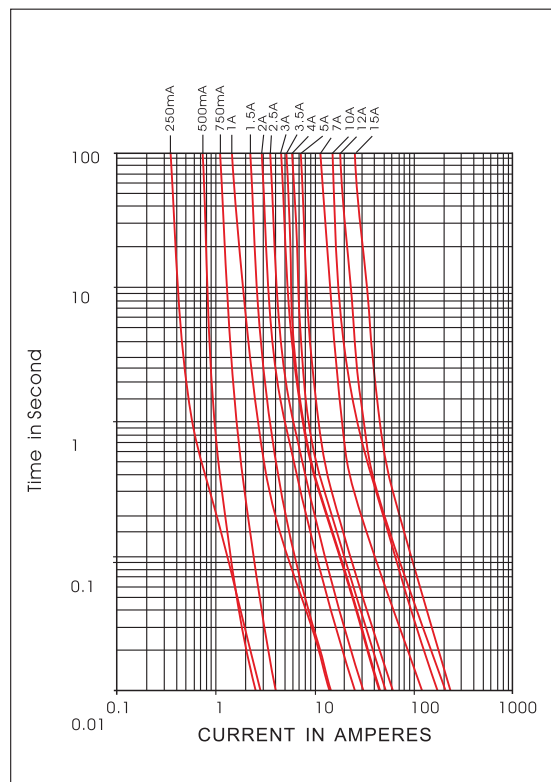

Electrical Specifications 電氣特性

Catalog Number 料號	Ampere Rated In 額定電流	Marking 標記	Voltage Rating (VDC) 額定電壓	Normal Resistance Cold(Ohm) 標準冷阻值	Normal Melting I ² T(A ² sec) 標準熔斷值
1025FA250mA	250mA	F0.25	AC250V/DC125V	5.0000	0.1212
1025FA500mA	500mA	F0.5	AC250V/DC125V	1.2000	0.0415
1025FA750mA	750mA	F0.75	AC250V/DC125V	0.6000	0.1430
1025FA1A	1A	F1	AC250V/DC125V	0.3000	1.750
1025FA1.5A	1.5A	F1.5	AC250V/DC125V	0.1040	1.460
1025FA2A	2A	F2	AC250V/DC125V	0.0800	6.086
1025FA2.5A	2.5A	F2.5	AC250V/DC125V	0.0510	8.48
1025FA3A	3A	F3	AC250V/DC125V	0.0390	18.15
1025FA3.5A	3.5A	F3.5	AC250V/DC125V	0.0300	17.83
1025FA4A	4A	F4	AC250V/DC125V	0.0270	23.32
1025FA5A	5A	F5	AC250V/DC125V	0.0200	38.74
1025FA7A	7A	F7	AC250V/DC125V	0.0116	138
1025FA10A	10A	F10	AC250V/DC125V	0.0076	457
1025FA12A	12A	F12	AC250V/DC60V	0.0055	498
1025FA15A	15A	F15	AC250V/DC60V	0.0041	1451

Electrical Characteristics 熔斷特性

Electrical Characteristics 熔斷特性		
Ampere Rating	% of Amp Rating	Opening Time
250mA-15A	100%	4 Hours Minimum
250mA-5A	200%	5 Seconds Maximum
250mA-5A	250%	1 Seconds Maximum
7A-15A	200%	20 Seconds Maximum
7A-15A	250%	4 Seconds Maximum

Approvals 認證

Safety Agency	Amp Range/Volt @ I.R ability
	250mA-10A 250V AC/125V DC@50A 12A-15A 250V AC/60V DC@50A

Operation Temperature 工作溫度

-40°C to 125°C

Physical Specification 物理特性

Materials 材料

Ceramic Body/Metallization of ceramic body
 Fuse Element:copper or copper Alloy
 End plate:copper
 High temperature solder preform
 End termination overcoat on both ends
 (Nickel Flash,Tin/Lead Overcoat)

Packaging 包裝

On Tape:1025FA-2500pcs Per Reel
 1025FA-15000 pcs outer box