




Type 5TH陶瓷管保險絲 Ceramic Time Lag Fuse

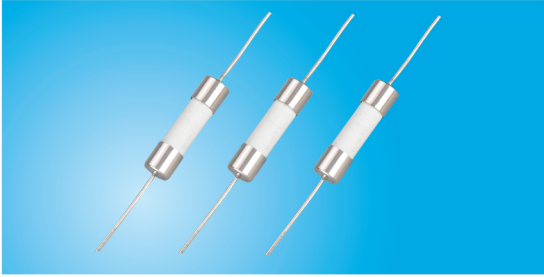

Dimensions(mm)尺寸

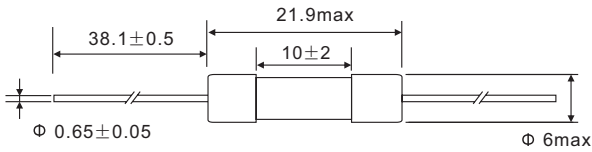

Time Current Characteristic Curve/電流-時間曲綫

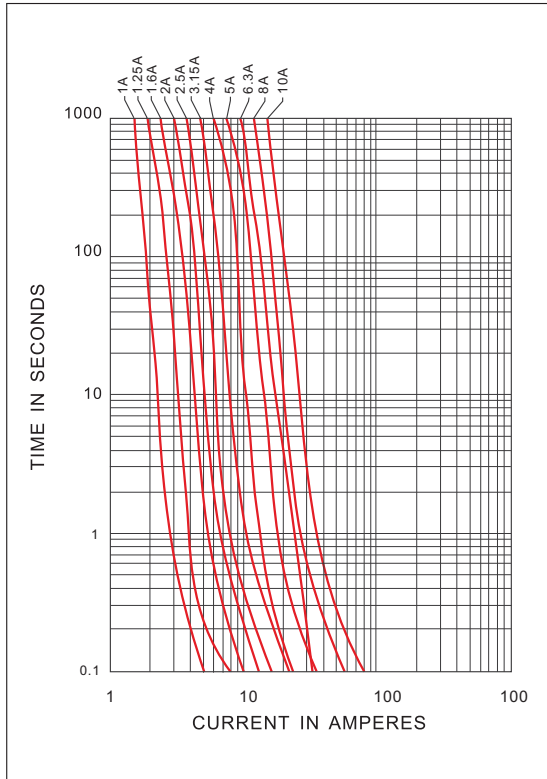

Electrical Specifications 電氣特性

Catalog Number 料號	Ampere Rated In 額定電流	Voltage Rating (VAC) 額定電壓	Normal Resistance Cold(Ohm) 標準冷阻值	Normal Melting I ² T(A ² sec) 標準熔斷值
5TH1	1A	250V	0.1401	1.280
5TH1.25	1.25A		0.1075	2.220
5TH1.6	1.6A		0.0700	6.780
5TH2	2A		0.0545	9.600
5TH2.5	2.5A		0.0395	16.60
5TH3.15	3.15A		0.0305	36.60
5TH4	4A		0.0178	38.45
5TH5	5A		0.0131	71.30
5TH6.3	6.3A		0.0095	111.0
5TH8	8A		0.0073	228.0
5TH10	10A	0.0054	397.0	

Electrical Characteristics 熔斷特性 (IEC60127-2 Sheet 3)

Electrical Characteristics 熔斷特性		
Ampere Rating	% of Amp Rating	Opening Time
1A-10A	150%	1 H Minimum
1A-10A	210%	1800s Maximum
1A-10A	275%	750ms-80s
1A-3.15A	400%	95ms-5s
4A-10A	400%	150ms-5s
1A-10A	1000%	10ms-150ms

Approvals 認證

Safety Agency	Amp range/Volt @ I.R.ability
	1A-10A/250VDC@1500A

Operation Temperature 工作溫度

-40°C to 125°C

Physical Specification 物理特性

Materials 材料

Ceramic body / Nickel Plated Brass Caps

Lead Wire: Tin plated Copper, Diameter 0.65mm

Packaging 包裝

On Tape: 5TH-1500pcs Per reel

5TH-6000pcs outer box