



Type 5TC/5TCP /陶瓷管電流保險絲 Ceramic Time Lag Fuse

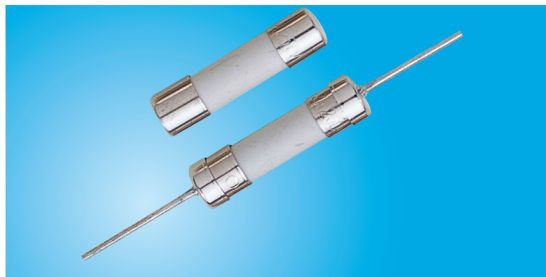


Dimensions(mm)尺寸

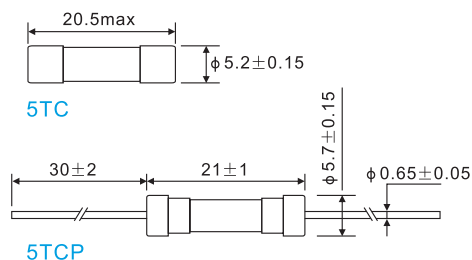

Electrical Specifications 電氣特性

Catalog Number 料號	Ampere Rated In 額定電流	Voltage Rating (VAC) 額定電壓	Normal Resistance Cold(Ohm) 標準冷阻值	Normal Melting I ² T(A ² sec) 標準熔斷值
5TC(P)250	250mA	250V	0.640	0.265
5TC(P)315	315mA		0.450	0.621
5TC(P)400	400mA		0.310	0.872
5TC(P)500	500mA		0.183	0.827
5TC(P)630	630mA		0.186	1.330
5TC(P)800	800mA		0.129	2.780
5TC(P)1	1A		0.076	6.450
5TC(P)1.25	1.25A		0.060	10.05
5TC(P)1.6	1.6A		0.043	21.70
5TC(P)2	2A		0.033	31.60
5TC(P)2.5	2.5A		0.026	59.40
5TC(P)3.15	3.15A		0.019	96.40
5TC(P)4	4A		0.014	71.80
5TC(P)5	5A		0.010	142.5
5TC(P)6.3	6.3A		0.007	237.6

Time Current Characteristic Curve/電流-時間曲綫

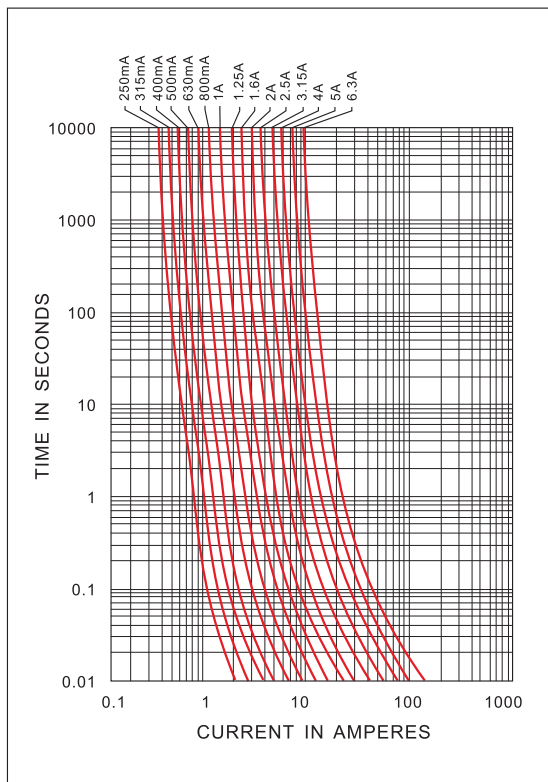

Electrical Characteristics 熔斷特性 (IEC60127-2 Sheet 5)

Testing Current	Blow Time	
	Minimum	Maximum
150%	1 hrs	N/A
210%	N/A	1800sec
275%	1s	80sec
400%	150 ms	5sec
1000%	20 ms	100ms

Approvals 認證

Safety Agency	Amp range/Volt @ I.R.ability
TUV, CULUS, CQC	250mA-6.3A/250V AC@1500A

Operation Temperature 工作溫度

-40°C to 125°C

Physical Specification 物理特性

Materials 材料

Ceramic body / Nickel Plated Brass Caps

Lead Wire: Tin plated Copper, Diameter 0.65mm

Packaging 包裝

In Bulk: 5TCP-200pcs bag

5TCP-18000 pcs outer box