


## Type 5TSH陶瓷管保險絲 Ceramic Time Lag Fuse


**RoHS**

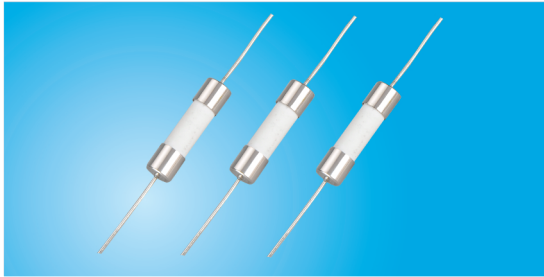

### Electrical Specifications 電氣特性

| Catalog Number<br>料號 | Ampere Rated In<br>額定電流 | Voltage Rating (VAC)<br>額定電壓 | Normal Resistance Cold(Ohm)<br>標準冷阻值 | Normal Melting I <sup>2</sup> T(A <sup>2</sup> sec)<br>標準熔斷值 |
|----------------------|-------------------------|------------------------------|--------------------------------------|--|
| 5TSH3.15             | 3.15A                   | 250V                         | 0.0176                               | 112.72   |
| 5TSH5                | 5A                      |                              | 0.0137                               | 179.00   |
| 5TSH6.3              | 6.3A                    |                              | 0.0107                               | 346.09   |


### Dimensions(mm)尺寸

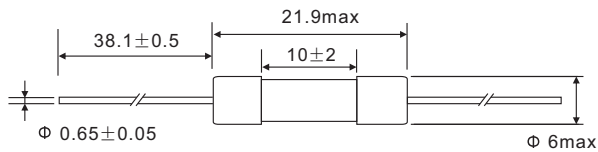

### Electrical Characteristics 熔斷特性 (IEC60127-2 Sheet 3)

| Ampere Rating | % of Amp Rating | Opening Time  |
|---------------|-----------------|---------------|
| 3.15A-6.3A    | 150%            | 1 H Minimum   |
| 3.15A-6.3A    | 210%            | 1800s Maximum |
| 3.15A-6.3A    | 275%            | 750ms-80s     |
| 3.15A         | 400%            | 95ms-5s       |
| 5A-6.3A       | 400%            | 150ms-5s      |
| 3.15A-6.3A    | 1000%           | 10ms-150ms    |

### Time Current Characteristic Curve/電流-時間曲綫

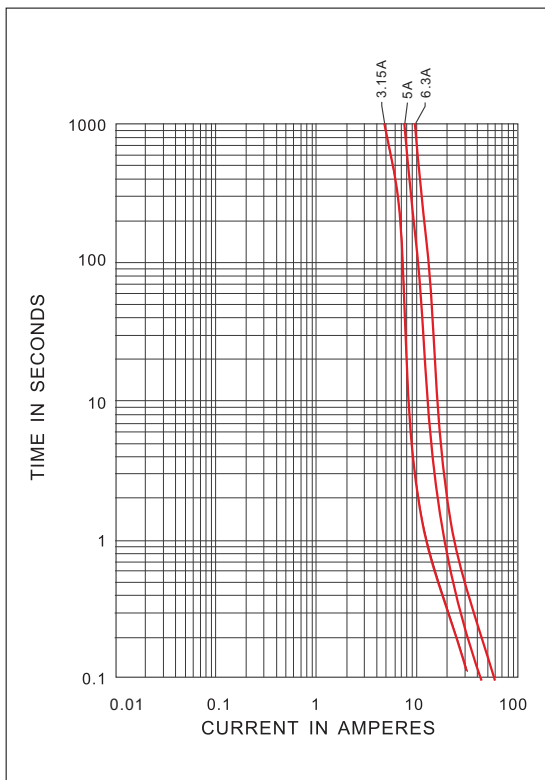

### Approvals 認證

| Safety Agency | Amp range/Volt @ I.R.ability |
|---------------|------------------------------|
|               | 3.15A-6.3A/250V DC@1500A     |

### Operation Temperature 工作溫度

-40°C to 125°C

### Physical Specification 物理特性

#### Materials 材料

Ceramic body / Nickel Plated Brass Caps

Lead Wire: Tin plated Copper, Diameter 0.65mm

#### Packaging 包裝

On Tape: 5TSH-1500pcs Per reel

5TSH-6000pcs outer box