



Type MSC/微型電流保險絲 Slow Blow Micro Fuse

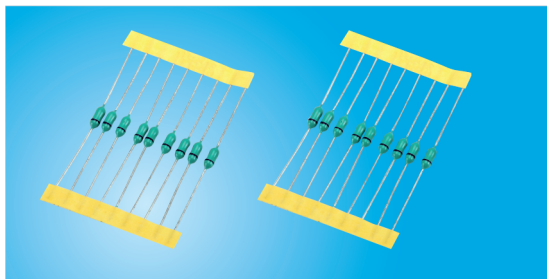


Dimensions(mm)尺寸

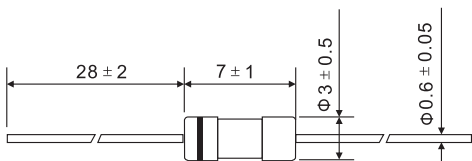

Electrical Specifications 電氣特性

Catalog Number 料號	Ampere Rated In 額定電流	Voltage Rating (VAC) 額定電壓	Normal Resistance Cold(Ohm) 標準冷阻值	Normal Melting I ² T(A ² sec) 標準熔斷值
MSC250	250mA	125V/ 250V	3.2000	0.042
MSC300	300mA		2.5700	0.056
MSC375	375mA		1.6600	0.101
MSC500	500mA		0.3040	0.18
MSC750	750mA		0.5500	0.44
MSC1	1A		0.0615	0.78
MSC1.25	1.25A		0.2300	1.41
MSC1.5	1.5A		0.0310	1.9
MSC2	2A		0.0246	3.4
MSC2.5	2.5A		0.0800	6.1
MSC3	3A		0.0160	11.7
MSC3.5	3.5A		0.0500	10.9
MSC4	4A		0.0120	17.6
MSC5	5A		0.009	35
MSC7	7A	0.007	63	

Time Current Characteristic Curve/電流-時間曲綫

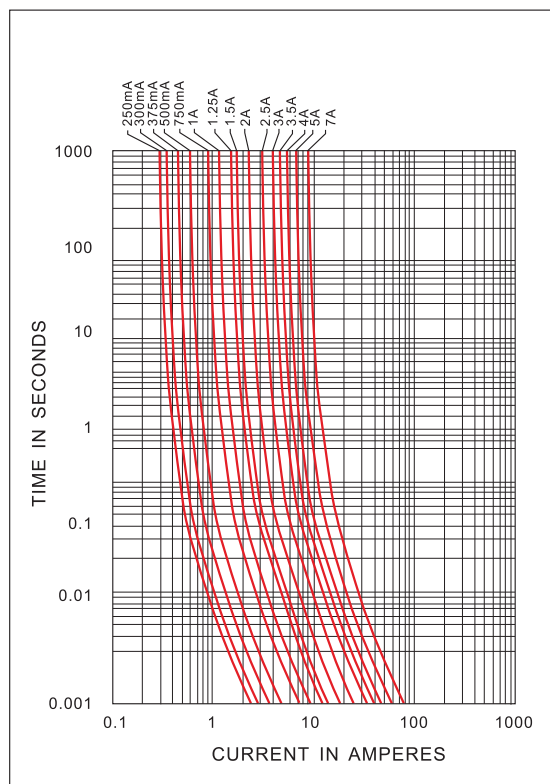

Electrical Characteristics 熔断特性 (UL248-14)

Testing Current	Blow Time	
	Minimum	Maximum
100%	4 hrs	N/A
200%	1s	60 sec

Approvals 認證

Safety Agency	Amp range/Volt @ I.R.ability
	250mA-7A/125V AC@50A 250mA-7A/250V AC@50A

Operation Temperature 工作温度

-40°C to 125°C

Physical Specification 物理特性

Materials 材料

Ceramic body / Nickel Plated Brass Caps
Lead Wire: Tin plated Copper, Diameter 0.6mm

Packaging 包裝

On Tape: MSC-2000pcs Per boxl
MSC-10000pcs per carton