



Type 0603FF/貼片保險絲 Fast Acting Chipfuse




Dimensions(mm)尺寸

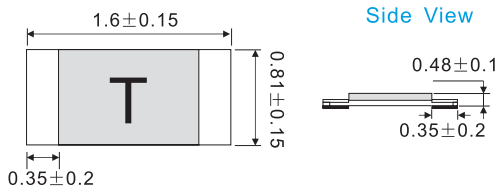

Recommended Pad Layout(mm)



Time Current Characteristic Curve/電流-時間曲綫

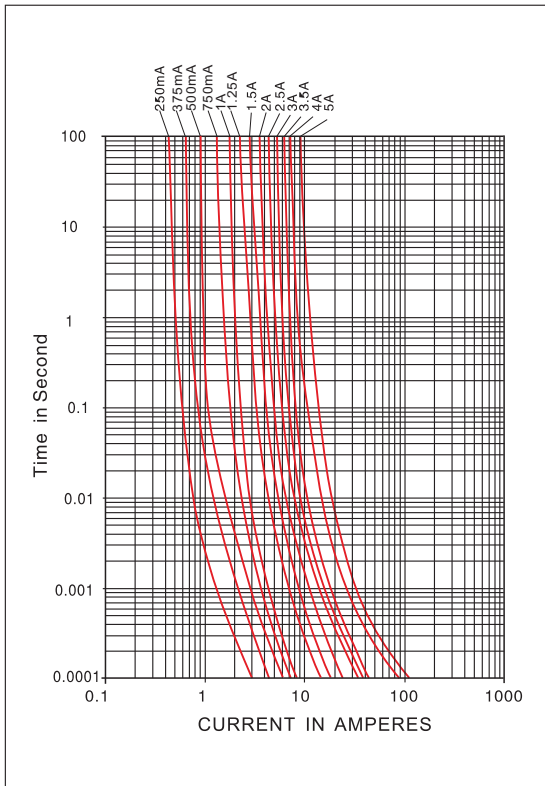

Electrical Specifications 電氣特性

Catalog Number 料號	Ampere Rated In 額定電流	Marking 標記	Voltage Rating (VDC) 額定電壓	Normal Resistance Cold(Ohm) 標準冷阻值	Normal Melting I ² T(A ² sec) 標準熔斷值
0603FF250mA	250mA	D	63V	3.250	0.0004
0603FF375mA	375mA	E	63V	1.310	0.0009
0603FF500mA	500mA	F	63V	1.070	0.0020
0603FF750mA	750mA	G	63V	0.470	0.0090
0603FF1A	1A	H	63V	0.145	0.0026
0603FF1.25A	1.25A	J	63V	0.104	0.0130
0603FF1.5A	1.5A	K	63V	0.083	0.0350
0603FF2A	2A	N	32V	0.049	0.0500
0603FF2.5A	2.5A	O	32V	0.035	0.0640
0603FF3A	3A	P	32V	0.026	0.0700
0603FF3.5A	3.5A	R	32V	0.021	0.1300
0603FF4A	4A	S	32V	0.016	0.2430
0603FF5A	5A	T	32V	0.010	0.7000

Electrical Characteristics 熔斷特性

Electrical Characteristics 熔斷特性	
% of Amp Rating	Opening Time
100%I _n	4 Hours Minimum
200%I _n	60 Seconds Maximum

Approvals 認證

Safety Agency	Amp Range/Volt @ I.R ability
	250mA-1.5A/63V DC@50A 2A-5A/32V DC@50A

Operation Temperature 工作溫度

-40°C to 125°C

Physical Specification 物理特性

Materials 材料

Ceramic Body/Glass Cover
Terminations: Silver over-plated with nickel and tin
Element: Silver or Silver / palladium

Packaging 包裝

On Tape:0603FF-5000pcs Per Reel
0603FF-50000 pcs outer box